



SETTING UP YOUR NL402 BACKPACK 190446



1. Assemble Pump Handle

Slide handle onto shaft and line up holes. Thread bolt through handle and shaft and securely tighten. Thread on lock nut and tighten using a 13mm (or adjustable) wrench. Handle can be mounted on left or right depending on user preference. See manual for all information of backpack. **(See Figure A)**

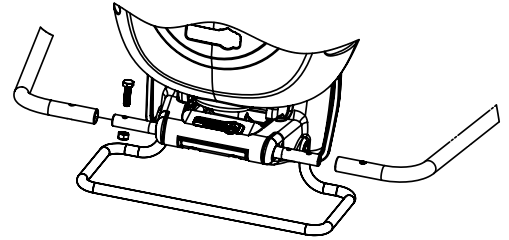


Figure A

2. Assemble 18" Brass Wand

Place 176332 check valve inside of 182659 brass wand. Then place nozzle on top and screw into place **(See Figure B)**

NOTE: Check valve must always be used.

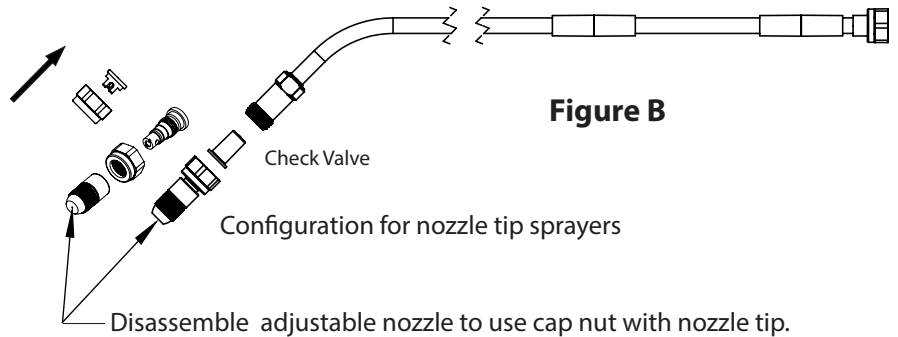


Figure B

2. Assemble XL Valve to Hose

Screw on XL Valve to end of hose from backpack **(See Figure C)**

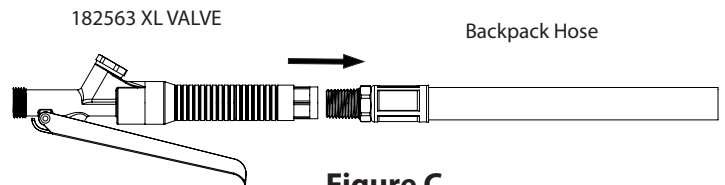


Figure C

3. Assemble Wand to Shut-off

Screw on Wand Assembly to Shut-off **(See Figure D)**

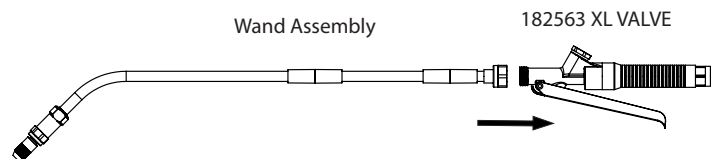


Figure D

PARTS INCLUDED WITH YOUR NL402 BACKPACK 190446



176332
CHECK VALVE
POLY PRO BLACK



181756
PUMP HANDLE
BOLT



182659
ASSEMBLY 18"
BRASS WAND



176171
TIP, TEEJET BRASS
TP8005




181757
PUMP HANDLE
NUT



176042
TIP, TEEJET BRASS
TP8002



182006
FOLDING HANDLE
INSTRUCTIONS



182563
XL VALVE (VITON)



182567
BRASS ADJUSTABLE
NOZZLE



182616
BACKPACK MANUAL



181889
SHOULDER HARNESS



182618
WARRANTY CARD